


# whirlwind™

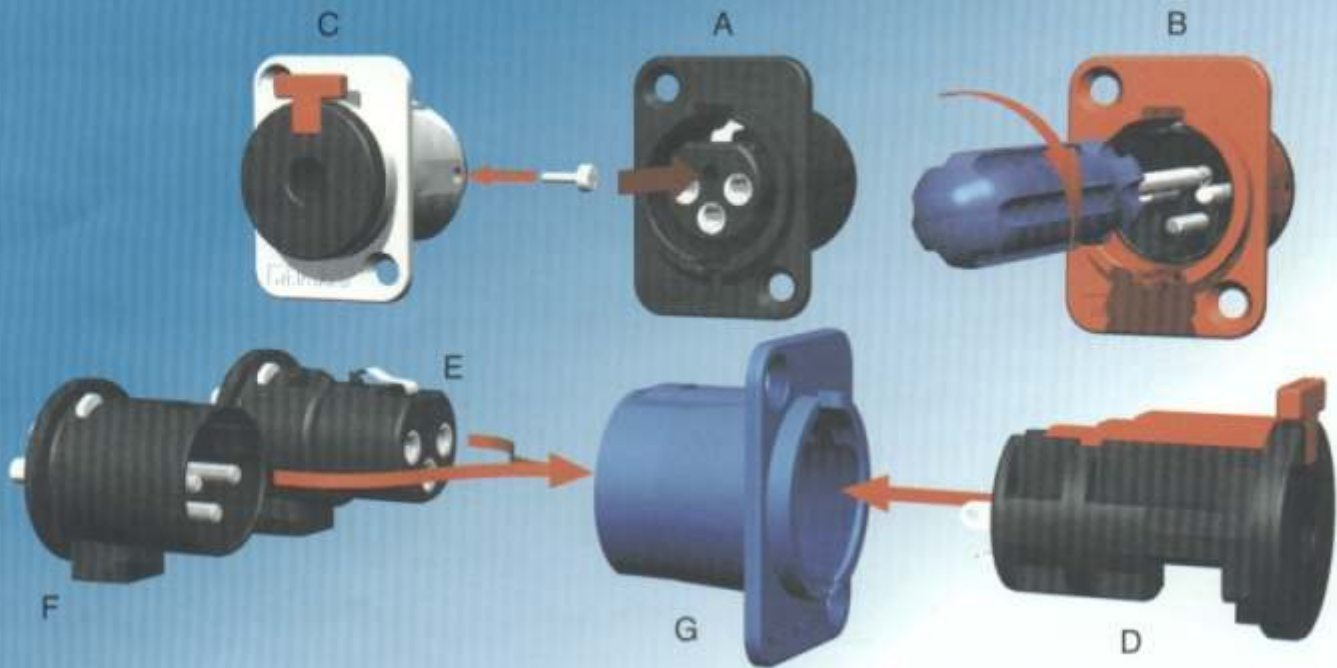


**whirlwind's** color coded connector series provides instant visual recognition and is designed to allow easy replacement of connector inserts. Please refer to the accompanying figures and instructions to change the type of connector insert or to replace a damaged insert.

The color coded connector system consists of a universal housing (figure G), female XLR (figure E), a male XLR (figure F) and a female 1/4" TRS jack (figure D).

The male and female XLR inserts mount into the housing from the rear and are secured by turning the small screw located in the center of the face of the insert in a clockwise direction (figures A, B and H). Turning the screw moves the locking tab located at the top of the insert into a locking position inside of the housing.

The female 1/4" TRS jack mounts into the housing from the front, and is secured by a small Phillips head screw located at the side and rear of the housing. When you receive a new 1/4" jack insert, this screw and the metal grounding tab will be included with the insert. Place the metal tab into the insert and install the insert into the housing from the front. Secure by installing the screw through the housing and into the insert mounting hole (figure C).

Complete connectors, inserts and colored housings in black, red, blue and white are available from any authorized **whirlwind** dealer.

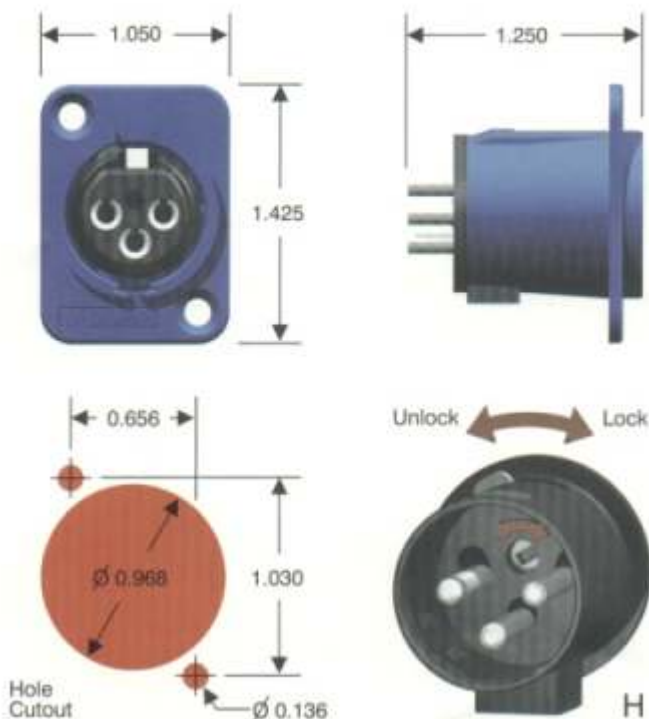

99 Ling Road - Rochester, NY 14612  
 Ph: 800-733-9473 Fax: 585-865-8930  
 Website: <http://www.whirlwindusa.com>  
 Email: [sales@whirlwindusa.com](mailto:sales@whirlwindusa.com)